
REMOTE CONTROL MIRROR (w/o POWER WINDOW)

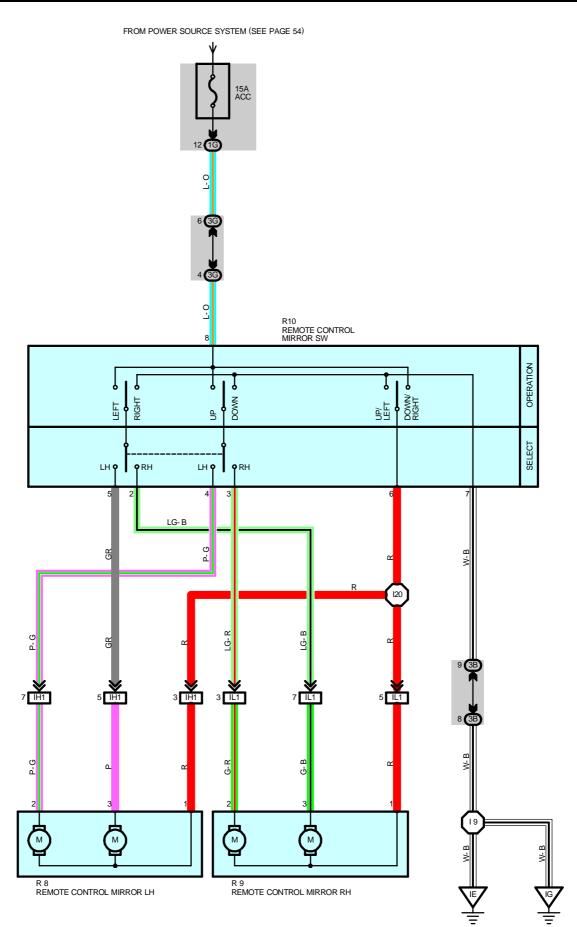

- SERVICE HINTS -

R10 REMOTE CONTROL MIRROR SW

- $\ensuremath{\texttt{8-GROUND}}$: Approx. 12 volts with ignition SW at ACC or ON position
 - 6-7 : Continuity with operation SW at UP or LEFT position
 - 8-6 : Continuity with operation SW at DOWN or RIGHT position

O : PARTS LOCATION

Code	See Page	Code	See Page	Code	See Page
R8	36 (Double Cab)	BO	36 (Double Cab)	B 10	36 (Double Cab)
	37 (Except Double Cab)	R9	37 (Except Double Cab)	R10	37 (Except Double Cab)

: JUNCTION BLOCK AND WIRE HARNESS CONNECTOR

Code	See Page	Junction Block and Wire Harness (Connector Location)
1G	23	Cowl Wire and J/B No.1 (Lower Finish Panel)
3B	24	Cowl Wire and J/B No.3 (Behind the Instrument Panel Left)
3G	26	Cowl Wire and J/B No.3 (Behind the Instrument Panel Center)

: CONNECTOR JOINING WIRE HARNESS AND WIRE HARNESS

Code	See Page	Joining Wire Harness and Wire Harness (Connector Location)
IH1	44	Front Door LH Wire and Cowl Wire (Left Kick Panel)
IL1	44	Front Door RH Wire and Cowl Wire (Right Kick Panel)
IL1	44	Front Door RH Wire and Cowi Wire (Right Rick Panel)

: GROUND POINTS

Code	See Page	Ground Points Location
IE	44	Around the Right Edge of the Reinforcement
IG	44	Around the Left Edge of the Reinforcement

: SPLICE POINTS

Code	See Page	Wire Harness with Splice Points	Code	See Page	Wire Harness with Splice Points
19	44	Cowl Wire	120	44	Front Door LH Wire